

TR40250 EVO IIIB Telescopic Handler

Telescopic Specifications

Performance

Lifting height — on stabilisers	24100.0 mm
Lifting height — on tyres	20800.0 mm
Rated capacity	4000 kg
Capacity (at max. height on stabilisers)	1800 kg
Capacity (at max. height on tyres)	1800 kg
Capacity (at max. reach on stabilisers)	200 kg
Capacity (at max. reach on tyres)	200 kg
Max. reach on stabilisers	20500.0 mm
Max. reach on tyres	13500.0 mm

Weights

Weight (unladen)	17540 kg
------------------	----------

Traction

Standard tyres	18 x 22.5 in, Heavy duty
1st gear / low range	10.0 km/h
2nd gear / high range	40.0 km/h
Gradeability	21.8°

Drive System

Transmission	Hydrostatic with variable load sensing pump
Main drive	2-speed gear box

Engine

Make / Model	FPT NEF Series
Fuel	Diesel
Cooling	Liquid
Rated power (ISO 14396)	141.0 HP
Rated power (ISO 14396)	105.0 kW
Maximum torque at 1400 RPM	590.0 Nm
Number of cylinders	4
Displacement	4.50 L

Hydraulic System

Pump type	Double gear pump
Pump capacity	135.00 L/min
Relief valve pressure setting	230.00 bar

Cycle Times

Telescope in time at max. reach - no load	23.1 s
Telescope out time at max. reach - no load	44.4 s

Brakes

Engine braking	Hydrostatic
Parking and emergency brake	Negative brake with electro-hydraulic command on rear axle


Fluid Capacities

Engine oil	14.40 L
Fuel tank	180.00 L
Hydraulic reservoir	270.00 L

Environmental

Operator noise level (LpA) (EN 12053)	77 dB(A)
Level of acoustic power (LWA)	107 dB(A)
Whole body vibration (EN 13059)	1.10 ms ⁻²
Whole body vibration uncertainty (EN 13059)	0.14 ms ⁻²
Hand-arm vibration (ISO 5349-1)	1.67 ms ⁻²


Dimensions

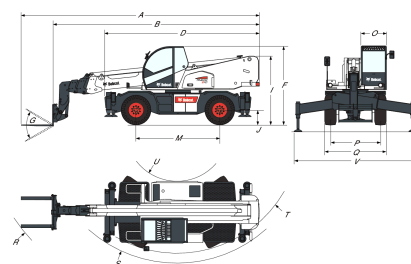

(A)	9200.0 mm	(O)	980.0 mm
(B)	8000.0 mm	(P)	1920.0 mm
(D)	5290.0 mm	(Q)	2380.0 mm
(F)	3025.0 mm	(R)	7375.0 mm
(G)	115.0°	(S)	4790.0 mm
(I)	2556.0 mm	(T)	4430.0 mm
(J)	360.0 mm	(U)	1700.0 mm
(M)	2950.0 mm	(V)	5070.0 mm

Load Charts

On stabilisers, with forks, 90°

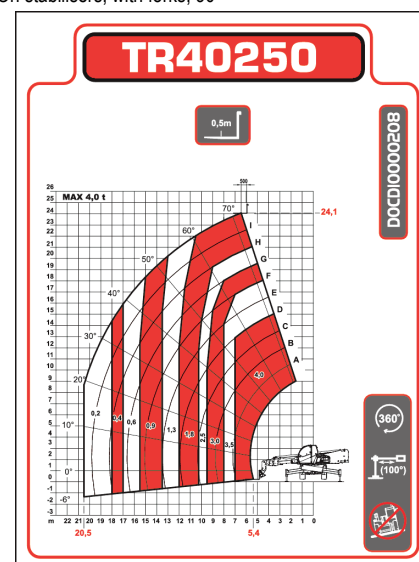

Options

180° turret rotation whilst driving kit	Digital camera on boom head with 7" monitor
Anti-theft immobiliser	Electronic accelerator adjustment on remote control
Auto-cleaning air prefilter	Integrated rear view system with 3.5" monitor
Carriage with hydraulic attachment lock	MB Carriage with hydraulic attachment lock
Catalytic purifier muffler	Remote control
Centering handler and positive/negative jib pre-arrangement	Spare wheel
Cold start	TÜV homologation
Cold weather kit	Webasto heater (Cold weather kit is compulsory)
Custom colour	Windscreen grill